




LED FLASH	
M1349	

RGB LED IC

三色灯 LED IC

FEATURES 功能叙述

- 8 Steps (R,G,B,RG,GB,RB,RGB) LED color Mixer.
- OSH : one-shot 4 section .
- ON/OFF : ON/OFF toggle (section 2).
- Automatic start the one shot function when power on.

Section	LED
1	单灯渐暗 1 LED fade
2	渐亮渐暗 Slow fade
3	单闪 1 LED flash
4	双闪 2 LED flash

APPLICATION 产品应用




- Blinking LED, Function indicator, R.G.B Mix etc..

ELECTRICAL CHARACTERISTICS 电气规格

(@V_{DD}=4.5V unless otherwise specified)

Characteristics	Sym.	Min.	Typ.	Max.	Unit	REMARKS
工作电压 Operating Voltage	V _{DD}	—	4.5	5	V	
工作电流 Operating Current	I _{OP}	—	0.1	0.5	mA	No load
静态电流 Quiescent Current	I _{SB}	—	1	5	μ A	
推动电流 Driving Current	I _{OL}	—	26	—	mA	@V _{DS} = 1.2 V
闪烁速度 Oscillator Frequency	F _{LED}	—	1.7	—	Hz	±30% TOL.
工作温度 Operating Temperature	Temp.	0	25	60	C°	

APPLICATION DIAGRAM 参考电路图

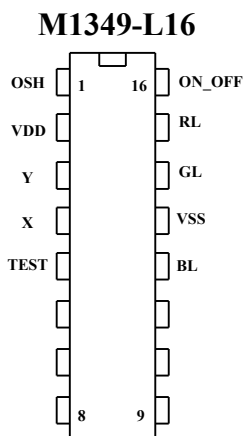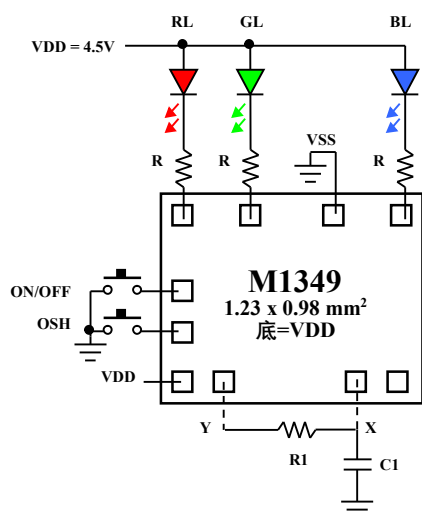

VDD=4.5V	
Color of the LED	Recommend resistance
Red (R)	47Ω
Green (G)	22Ω
Yellow Green (YG)	
Blue (B)	0Ω

Section 1 R、C 调整表


@VDD=4.5V			
R (KΩ)	TIME (Sec.)	C (pF)	TIME (Sec.)
20	2.5	1	15.4
47	4	82	25
68	5.3	180	28.1
120	7.2	330	30
330	10.7	500	31
910	13	680	31.8

* Typical : 37 Sec. ± 20%

* External C1 : decrease the Fosc.

* External R1 : increase the Fosc.




LED FLASH	
M1349	

RGB LED IC

三色灯 LED IC

PAD ASSIGNMENT & POSITION



No.	NAME	UNIT : um	
		X	Y
1	RL	-490.00	363.25
2	GL	-192.50	363.25
3	VSS	178.00	363.25
4	BL	489.00	363.25
5	TEST	437.50	-364.00
6	X	262.50	-364.00
7	Y	-315.00	-364.00
8	VDD	-490.00	-364.00
9	OSH	-490.00	-141.00
10	ON OFF	-490.00	34.00

* CHIP SIZE ~ 1.23 x 0.98 mm²

* IC substrate should be connected to VDD in PCB (PCB 上 IC 必须接 VDD)

*All specs and applications shown above subject to change without prior notice.
(以上电路及规格仅供参考,本公司得径行修正)